




Vinyl Shutters - Frame Options



Vinyl Shutter Frame Options - Specifications

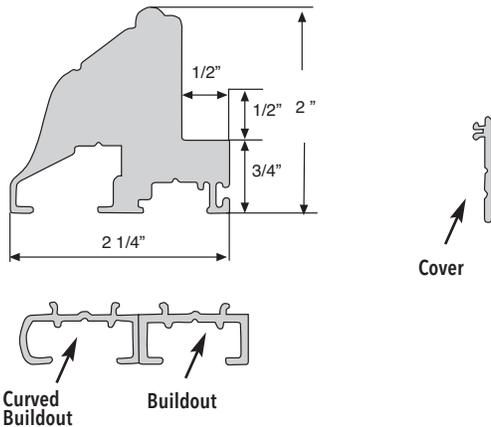


Traditional Frame

- Mounting Type: Outside mount (OM) only.
- Overall depth: 2"
- Overall Width: 2 1/4" (backside)
- Screwcover: Snap in round screw cap.

Features: An outside mount frame designed to be installed directly onto the wall surrounding the window or on top of existing trim surrounding the window.

The 1/2" buildout acts as a projection when extra clearance is required for the louvers. A maximum of two 1/2" buildouts may be added.

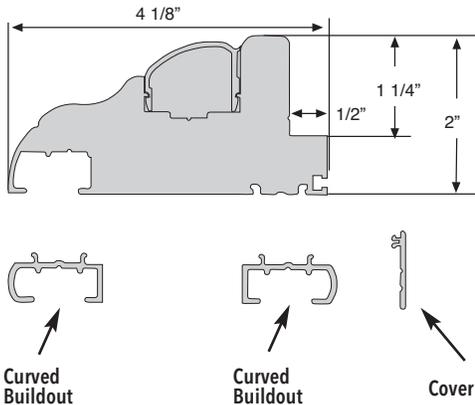


Deluxe Casing Frame

- Mounting type: Outside mount (OM) only.
- Overall depth: 2"
- Overall width: 4 1/8" (backside)
- Screwcover: Snap in round screw cap

Features: An outside mount frame designed to be installed directly on to the wall surrounding the window or on top of existing trim surrounding the window. The 1/2" buildout acts as a projection when extra clearance is required for the louvers. A maximum of two 1/2" buildouts may be added.


Note: 1/2" Curved buildout and 1/2" buildout are interchangeable on Traditional Frame, Deluxe Casing Frame and Squareness Frame.

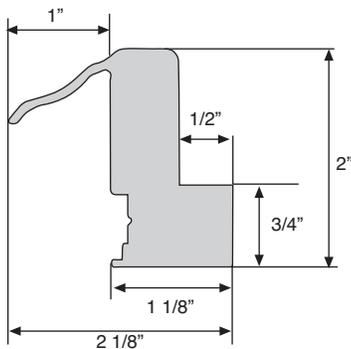

Designer Frame

- Mounting type: Inside mount (IM) only.
- Overall depth: 2"
- Overall width: 1 1/8" (backside)
- Screwcover: Snap in round screw cap.

Features: An inside mount frame to be installed directly into the window opening. Unique designer decorative look hides out-of-square areas.

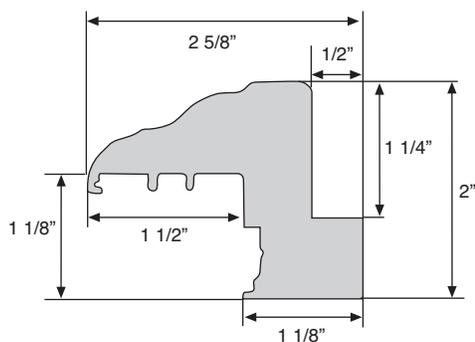


Colonial Z Frame

- Mounting type: Inside mount (IM) only.
- Overall depth: 2"
- Overall width: 1 1/8" (backside)
- Screw cover: Snap in round screw cap.

Features: An inside mount frame to be installed directly into the window opening. The face of the frame acts as a decorative cover that hides out-of-square areas.


NOTES	
• Talento Shutters only available with:	
	Traditional Frame
	Squareness / French Door Frame
	Designer Frame
	Clearance Frame
	Mini Designer Frame
	Micro Designer Frame
	Designer Frame with Partial Lip
	Colonial Z Frame

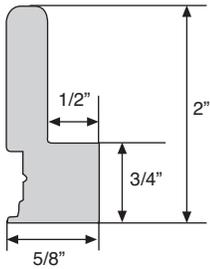

Clearance Frame

- Mounting type: Inside mount (IM) only.
- Overall depth: 2"
- Overall width: 5/8" (backside)
- Screwcover: Snap in round screw cap.


Features: An inside mount frame to be installed directly into the window opening. To be utilized when latches or cranks are an issue for clearance.

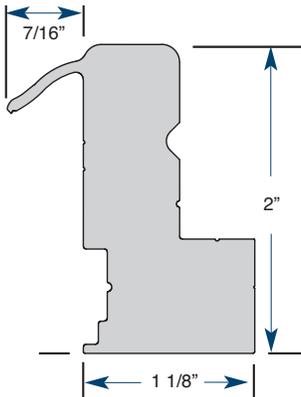

Designer Frame with Partial Lip

- Mounting Type: Inside mount (IM) only.
- Overall depth: 2"
- Overall Width: 1 1/8"
- Screwcover: Snap in round screw cap.


Features: An inside mount frame to be installed directly into the window opening. The face of the frame acts as a decorative cover that hides out-of-square areas.

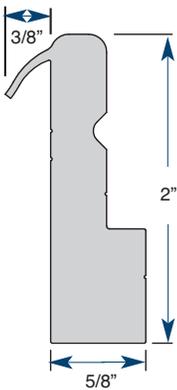

Micro Designer Frame

- Mounting Type: Inside mount (IM) only.
- Overall depth: 5/8"
- Overall Width: 5/8"
- Screw cover: Snap in round screw cap.

Features: An inside mount frame to be installed directly into the window opening. The face of the frame acts as a decorative cover that hides out-of-square areas.

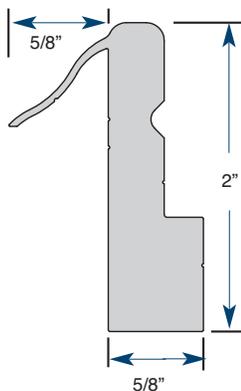

Mini Designer Frame

- Mounting Type: Inside mount (IM) only.
- Overall depth: 2"
- Overall Width: 5/8"
- Screwcover: Snap in round screw cap.


Features: An inside mount frame to be installed directly into the window opening. The face of the frame acts as a decorative cover that hides out-of-square areas.



Vinyl Shutters - Frame Options



Vinyl Shutter Frame Options - Specifications

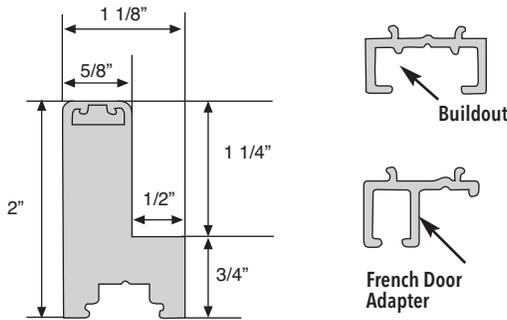


Squareness Frame / French Door Frame

- Mounting type: Inside mount (IM), Outside mount (OM) and French Door Frame

- Overall depth: 2"
- Overall width: 1 1/8" (backside)
- Screw cover: Snap in round screw cap.


Features: A universal frame that can be utilized for inside and outside mounts. May be installed flush directly into the window opening or protruding forward. The French door 1/2" adapter enables you to mount the frame around existing French door moulding. The 1/2" buildout acts as a projection when extra clearance is required for the louvers. A maximum of two 1/2" buildouts may be added.

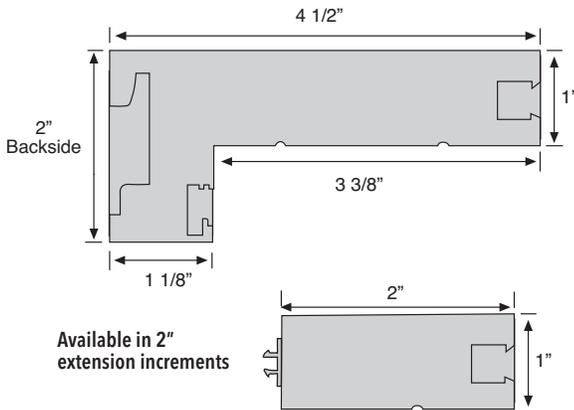

Bypass Track System Frame

- Mounting type: : Inside mount (IM) and Outside mount (OM)
- Overall depth: 4 1/2"
- Overall width: 2" (backside)
- Screw cover: Filler strip on screw port.
- Optional frame extension for third track.

Features: Can be mounted directly into the door or window opening or outside mounted onto the wall around the opening. 2" extensions can be added to form the open bypass configuration.

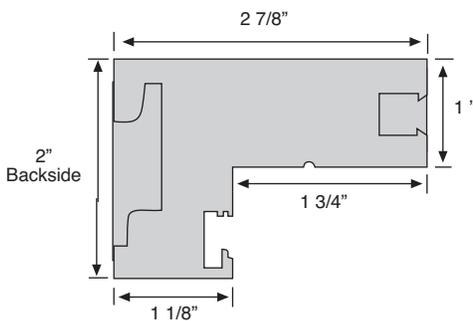


Bi-fold Track System Frame

- Mounting type: : Inside mount (IM) and Outside mount (OM)
- Overall depth: 2 7/8"
- Overall width: 2" (backside)
- Screw cover: Filler strip on screw port.
- Optional frame extension for third track.

Features: Can be mounted directly into the door or window opening or outside mounted onto the wall around the opening.

Clearing Obstructions

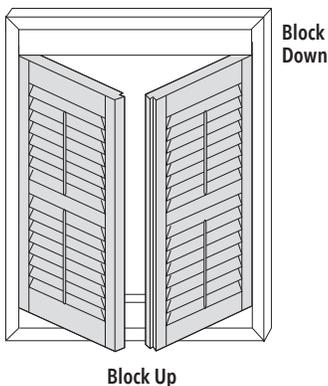

Space Filler - Block up / Block Down

Within a shutter frame you can start or stop a shutter panel to avoid an obstruction caused by taps, tubs, valances or light fixtures by simply blocking up or blocking down using our T-Posts or Top/Bottom Rails before the shutter door begins (see diagram).

Note: Shutters that are blocked up or down cannot have magnets installed at the block up or down position (has to be specified at time of order). Measurements must be overall size including frame. Specify measure of block down or block up required.